

AERODYNAMIC INTERFERENCE BETWEEN TWO DARRIEUS WIND TURBINES

P. R. Schatzle, P. C. Klimas, and H. R. Spahr

Prepared by Sandia Laboratories, Albuquerque, New Mexico 87185
and Livermore, California 94550 for the United States Department of
Energy under Contract DE-AC04-78DP00789.

Printed April 1981

***When printing a copy of any digitized SAND
Report, you are required to update the
markings to current standards.***



Sandia National Laboratories
energy report



Issued by Sandia National Laboratories, operated for the United States Department of Energy by Sandia Corporation.

NOTICE: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government, any agency thereof or any of their contractors or subcontractors. The views and opinions expressed herein do not necessarily state or reflect those of the United States Government, any agency thereof or any of their contractors or subcontractors.

Aerodynamic Interference Between Two Darrieus Wind Turbines

P. R. Schatzle, P. C. Klimas, and H. R. Spahr

Abstract

The effect of aerodynamic interference on the performance of two curved bladed Darrieus-type vertical axis wind turbines has been calculated using a vortex/lifting line aerodynamic model. The turbines have a tower-to-tower separation distance of 1.5 turbine diameters, with the line of turbine centers varying with respect to the ambient wind direction. The effects of freestream turbulence were neglected. For the cases examined, the calculations showed that the downwind turbine power decrement (1) was significant only when the line of turbine centers was coincident with the ambient wind direction, (2) increased with increasing tip speed ratio, and (3) is due more to induced flow angularities downstream than to speed deficits near the downstream turbine.

Nomenclature

A_f	projected frontal area of turbine, m^2
c	blade chord, m
C_L	blade lift coefficient ($L/\frac{1}{2}\rho_\infty V_\infty^2 c$)
C_p	power coefficient ($Q\omega/\frac{1}{2}\rho_\infty V_\infty^3 A_f$)
D	equatorial diameter of turbine, m
F_c	chordwise blade force coefficient ($\text{force}/\frac{1}{2}\rho_\infty V_\infty^2 \ell_e c$)
H	turbine height, m
ℓ_e	blade element length, m
L	blade lift, N/m
N	number of blades
P	turbine power output ($Q\omega$), kW
Q	turbine shaft torque, N/m
R	equatorial radius of turbine, m
Re_c	Reynolds number based on chord ($\rho_\infty V_R c/\mu_\infty$)
u	streamwise induced flow, m/sec
V	velocity, m/sec
X	tipspeed ratio ($R\omega/V_\infty$)
α	local blade angle of attack, deg
Γ	dimensionless airfoil circulation ($\frac{1}{2}C_L C_R c/V_\infty R$)
ω	angular velocity, rad/sec

Subscripts

R	relative to local
∞	freestream conditions

Introduction

Since its inception, the DOE Wind Energy Program has been largely concerned with the problems associated with individual wind turbines and systems. As the single turbine state-of-the-art has progressed, increasing attention is being given to the operation of turbines in multiple machine arrays. This attention is required because of the impact of turbine spacing on interconnect and land usage costs. Small separation distances work toward minimizing these as long as array members are not so close as to negatively interfere with each other aerodynamically. Sandia National Laboratories, with its Darrieus Wind Turbine Program, is interested in the problem of optimizing these separation distances.

Darrieus turbine aerodynamics is different from and somewhat more complicated than that of most horizontal axis wind turbines. Blades normally operate in both the linear and deep stall portions of the C_L vs α curve. Although the wake may be periodic, it is unsteady and unsymmetrical. The flow-field downstream of an advancing blade differs from that downstream of a retreating blade and the blades do not operate independently of each other. There is always some degree of mutual interaction as blades cut wakes generated by those preceding. A mathematical representation which treats all of these effects is the vortex/lifting line model developed by Strickland, Webster, and Nguyen.¹ In particular, it calculates a highly detailed wake. This wake is felt to be representative of actual turbine wakes within a few downwind diameters, i.e., before the non-included dissipative effects of atmospheric turbulence are no longer negligible. The model is viable and may be modified to simultaneously treat more than one turbine. As long as separation distances are small, the aerodynamic calculations may be considered realistic.

This report describes a study of aerodynamic interference between two Darrieus turbines using a vortex/lifting line model without the effects of freestream turbulence.

Aerodynamic Model

Strickland, Webster, and Nguyen¹ have developed a three-dimensional model for use in predicting performance and detailed blade loads on a single Darrieus turbine, in which the blades and their wakes are replaced by an equivalent system of bound and free vortices. As the names imply, the bound vortices remain attached to the blades and rotate with them while the free vortices are shed from the blades into the ambient flow. The strength of the bound vortex (circulation) at any point on the blade is determined from the local blade lift using the Kutta-Joukowski law, while the strengths of the free vortices are given in terms of the spatial and temporal variation of the circulation by Helmholtz's and Kelvin's theorems. Once the strengths of the vortex filaments are known, the Biot-Savart law may be used to determine the velocity induced by the entire vortex system on any point. The total velocity seen by points on the blades is therefore the vector sum of the ambient, rotational, and induced velocities, while the free wake filaments experience only the ambient and induced velocities. Having obtained the velocity components on a given blade segment, the local angle of attack is computed and used to determine the aerodynamic forces acting on the segment by interpolation in the lift and drag tables for the particular airfoil section used. Finally, the velocities of the wake filaments are integrated with respect to time to yield a developing wake geometry.

An interesting feature of this model is the fact that a detailed account of the rate at which energy is extracted from the wind is communicated downstream via the free vortex system. As more energy is removed from the wind, the amount of work done on the turbine increases, which means that the

integral of the chordwise blade forces along the path of rotation increases. This implies an increase in the blade lift since it is the dominant component of the chordwise force. Accordingly, there is an increase in circulation on the blades and a corresponding increase in the strength of the shed vortices, resulting in higher induced velocities. A change in power output thus manifests itself in higher induced velocities downstream.

The presence of the free vortex system downwind of the turbine thus makes this model an attractive candidate for use in studying the aerodynamic interference on turbines in proximity. The VDART3 computer code developed by Strickland, et al, has been modified by the present authors in order to predict performance of an arbitrary number of Darrieus turbines. The turbines are required to be geometrically identical and to operate in phase but may be located wherever desired. A further refinement has been to interpolate on Reynolds number as well as angle of attack when computing blade element forces from the tabulated airfoil section data. In addition, an extensive graphics capability has been added in order to speed interpretation of results. This is described in more detail in the section Computer Codes Used. The ability of the modified code (VDARTC) to accurately predict performance of a single turbine is demonstrated in Fig. 1 while the predicted wake geometry for the same turbine is given in Fig. 2.

Computer Codes Used

The mathematical model of clustered three-dimensional vertical axis wind turbines, discussed in the previous section, was implemented in computer code VDARTC. VDARTC, while based on the VDART3 computer code², has been modified extensively by:

1. Permitting the definition of the locations of the clustered turbines and computing the locations of each blade element for each turbine.
2. Properly allocating the array elements for computed variables to the appropriate blade elements for each wind turbine.
3. Adding a two-dimensional interpolation subroutine to include the effects of local blade element Reynolds number and the angle of attack on aerodynamic coefficients.

The program is now operational on the Sandia CDC Cyber 76 and 7600 computers using 111,216 (octal) words of small core memory and 155,030 (octal) words of large core memory in a batch mode.

The mathematical model of clustered wind turbines was also implemented in computer code WINMIL, an interactive graphics computer code being developed at Sandia to analyze two- and three-dimensional vertical axis wind turbines and giromills. The interactive feature, with human engineering, allows one to rapidly and easily make runs and the graphics output, described later, helps provide insight into the wake structure from the turbines and the variations of pertinent blade parameters with blade azimuthal position.

The graphics implementation of the clustered wind turbine model was based on the VDARTC computer code, with the simplification made to use a constant Reynolds number for all blade elements to minimize computer core requirements. To minimize core requirements, WINMIL consists of 29 overlays with 353 FORTRAN subroutines. WINMIL uses the Graphics Compatibility System (GCS) graphics language³⁻⁶.

For short runs, WINMIL is used on a Sandia CDC 6600 computer using Network Operating System (NOS) software in an interactive mode with Texas Instrument Silent 700 series terminals, and Tektronix 4006, 4010, 4012, 4013, 4014, 4015, 4027 (color terminal), 4051, and 4081 terminals. The computer code uses 107,603 (octal) core locations.

For longer runs, the interactive WINMIL program prepares the input data and then routes it to the Sandia Cyber 76 or 7600 computers using SCOPE operating software. The batch version of the WINMIL program uses 120,102 (octal) words of small core memory and 166,100 words of large core memory.

Output of the WINMIL program consists of:

1. Plots of the aerodynamic data being used for the airfoil and Reynolds number selected.
2. Plots of the vortex wakes shed by the equatorial element of each blade of each turbine.
3. Plots of airfoil angle of attack, airfoil nondimensional circulation, airfoil nondimensional normal force, and local nondimensional total velocity for each equatorial element of each blade of each turbine as a function of azimuthal position around the rotor revolution.
4. Tabulated average rotor power coefficients for each revolution.

This graphical output is easily available in a number of forms. These include hardcopy plots from the interactive terminals and black and white and color 35 mm slides and black and white and color movies made by off-line computer output microfilm systems. Some of this graphical output has been used in the preparation of this report.

Some of the runs required to generate the results for one orientation of the turbines and one tip speed ratio required over two hours of CDC Cyber 76 or 7600 computer time. Obviously, both Sandia National Laboratories and its contractors⁷ are pursuing ways to reduce the computer time required by these computer codes.

Test Cases

The large amount of CPU time required to run VDARTC prevents an extensive compilation of interference data in this report. Presented here is the predicted interference effect between two Darrieus wind turbines (Sandia 17-m configuration) with tower-to-tower spacing equal to three equatorial radii. The Sandia 17-m turbine is a $H/D = 1$, troposkein approximation, blade planform machine having 2 blades of 0.61 m chord NACA 0015 profile. It develops 80 kW in a 19.7 m/sec ambient wind at 1585 m altitude. The turbine solidity, σ , is 0.146. Eight different orientations of the turbines were investigated as shown in Fig. 3, and the corresponding power coefficients obtained at a tip speed ratio of 3 are tabulated in Table 1. This tip speed ratio was chosen because historically, the maximum value of shaft power is obtained near $X_{\infty} = 3$. Of special interest is the case where the turbines are aligned in the streamwise direction (configuration A) since the largest power loss occurs there. For this orientation, a more complete power curve was generated and is shown in Fig. 4 compared to the predicted single turbine curve. The band on the downwind turbine prediction arises from the difficulty in obtaining numerical convergence at moderately high tip speed ratios. Finally, Fig. 5 presents a typical sequence of plots which shows the development of the free vortex systems for both turbines ($X_{\infty} = 4$).

TABLE 1
 Predicted Power Coefficients for
 Different Configurations, $X_{\infty} = 3$

Configuration	Turbine 1	Turbine 2
A	.200	.160
B	.199	.197
C	.199	.199
D	.199	.200
E	.160	.200
F	.197	.199
G	.199	.199
H	.200	.199
Single Turbine	.199	

Discussion of Results

The data summarized in Table 1 indicate that, for a tower-to-tower spacing of three equatorial radii and $X_{\infty} = 3$, the only orientation which produces a significant change in turbine power output is when the turbines are aligned in the stream-wise direction. This is not surprising since the wake from the upwind turbine passes through the downwind turbine in this alignment, but not in the others. A more thorough investigation of the power curve (Fig. 4) for this alignment indicates that the power loss in the downwind turbine increases as the tip speed ratio increases, at least over the range of speed presented.

The power loss at a given tip speed ratio may be explained by considering the structure of the free vortex system associated with the upwind turbine. Figure 6 shows how the circulation on the equatorial blade element of the upwind turbine varies with angular position (θ) of the turbine (the sign convention for θ is shown in Fig. 7). Kelvin's theorem dictates that the strength of a shed vortex is equal in magnitude

and opposite in sign to the temporal change in circulation of a blade element. It is evident that the circulation becomes increasingly negative over the left-hand side of the rotor ($\theta = 90^\circ$ to $\theta = 270^\circ$, roughly), and positive over the right-hand side ($\theta = 270^\circ$ back through $\theta = 0^\circ$ to $\theta = 90^\circ$). This means that, on the average, the vortices shed during the right-hand half of the revolution will be negative sense (clockwise viewed from above) and those shed on the left-hand side will be positive sense (counterclockwise viewed from above). This situation is illustrated in Fig. 7. It can be seen that a significant streamwise velocity is induced against the ambient flow by the free vortex system. The variation of the induced streamwise flow seen by a blade element as it rotates around the turbine is shown for both turbines in Fig. 8. (The data in Figs. 8-11 are for the equatorial blade segments, configuration A, $X_\infty = 4$. Downwind 1 and 2 refer to different blades on the downwind turbine.) It might be expected that the difference in power output of the two turbines is due to smaller total velocity (greater induced flow) seen by the downwind turbine blades. Figure 9 shows, however, that although the variation of total velocity with θ has a different character for the two turbines, the total velocities themselves (ambient plus induced plus rotation) are not significantly different. This is because the total velocity is dominated by the rotational component of velocity, at least at moderate tip speed ratios. The major effect of the induced streamwise flow is to modify the local blade element angle of attack as shown in Fig. 10. This results in lower chordwise blade forces (Fig. 11) and, hence, lower torque and power. Therefore, as the tip speed ratio of the upwind turbine increases, the blade circulation increases accompanied by an increase in the strength of the shed vortices, resulting in higher induced velocities, lower angles of attack downstream, and correspondingly, lower torque and power output. The trends in Fig. 4 thus appear reasonable.

Conclusions

The mutual aerodynamic interference between two 17-m diameter Darrieus wind turbines with a tower-to-tower separation distance of 1.5 diameter has been calculated using a vortex/lifting line model neglecting the effects of freestream turbulence. The calculations showed that, for the configurations examined, downstream turbine power reductions:

1. Are significant only when the two turbines were aligned with the ambient wind direction.
2. Increase with increasing tip speed ratio for a fixed separation distance.
3. Are due more to changes in downstream flow angularities than velocity deficits.

The calculation of downstream turbine power decrements at separation distances greater than 1.5 diameter could be calculated if a suitable velocity deficit decay model were added to the basic vortex scheme.

References

1. Strickland, J. H., Webster, B. T., and Nguyen, T., "A Vortex Model of the Darrieus Turbine: An Analytical and Experimental Study," American Society of Mechanical Engineers Paper No. 79-WA/FE-6, December 1979.
2. Strickland, J. H., Webster, B. T., and Nguyen, T., "A Vortex Model of the Darrieus Turbine" (A Final Report Submitted to Sandia National Laboratories on Sandia Contract No. 06-4178), Texas Tech University, Lubbock, Texas, January 1979.
3. GCS, The Graphics Compatibility System, Primer, Sandia National Laboratories, Albuquerque, New Mexico.
4. GCS, The Graphics Compabitility System, Reference Manual, Sandia National Laboratories, Albuquerque, New Mexico.
5. Primer on Computer Graphics Programming (GCS), U.S. Army Corps of Engineers, Waterways Experiment Station, Vicksburg, Mississippi, 1978.
6. Graphics Compatibility System (GCS) Programmer's Reference Manual, U.S. Army Corps of Engineers, Waterways Experiment Station, Vicksburg, Mississippi, 1978.
7. Strickland, J. H., "A Vortex Model of the Darrieus Turbine: An Analytical and Experimental Study" (A Progress Report Submitted to Sandia National Laboratories on Sandia Contract No. 13-5602, Period Covered: March 20, 1979 to August 20, 1979), Texas Tech University, Lubbock, Texas, September 1979.

- FIGURE 1 Single Turbine Efficiency - Predicted vs Measured
- FIGURE 2 Predicted Wake Geometry - Sandia 17-m Turbine, $X_{\infty} = 4$
(Wake From Equatorial Segment of One Blade Only)
- FIGURE 3 Orientation of Turbines in Test Case
- FIGURE 4 Predicted Turbine Efficiencies, Configuration A
- FIGURE 5 Predicted Wake Geometry, Configuration A, $X_{\infty} = 4$
(Wake From Equatorial Segment of One Blade Only)
- FIGURE 6 Azimuthal Variation of Circulation, Equatorial Segment of Upwind Turbine, $X_{\infty} = 4$
- FIGURE 7 Streamwise Flow Induced by Vortex System
- FIGURE 8 Azimuthal Variation of Induced Streamwise Flow,
 $X_{\infty} = 4$
- FIGURE 9 Azimuthal Variation of Total Velocity, Equatorial Segments, $X_{\infty} = 4$
- FIGURE 10 Azimuthal Variation Angle of Attack, Equatorial Segments, $X_{\infty} = 4$
- FIGURE 11 Azimuthal Variation of Chordwise Blade Force, Equatorial Segments, $X_{\infty} = 4$

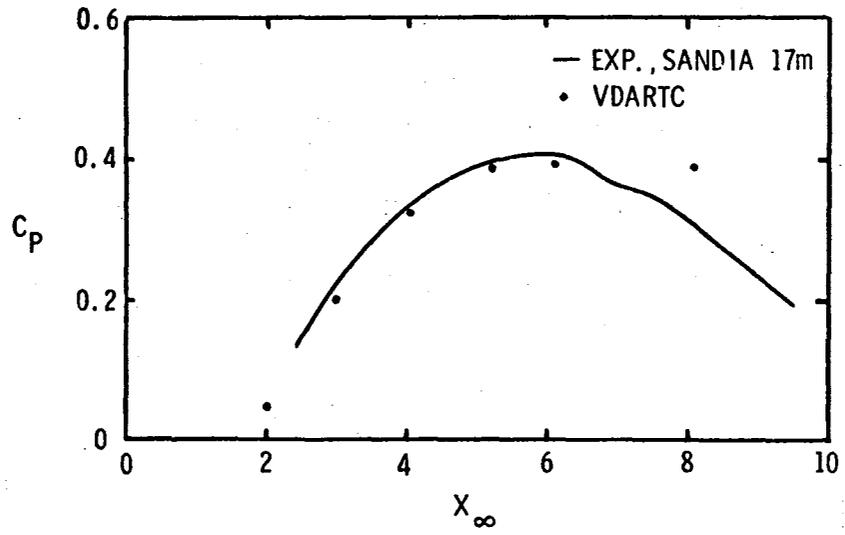


FIGURE 1

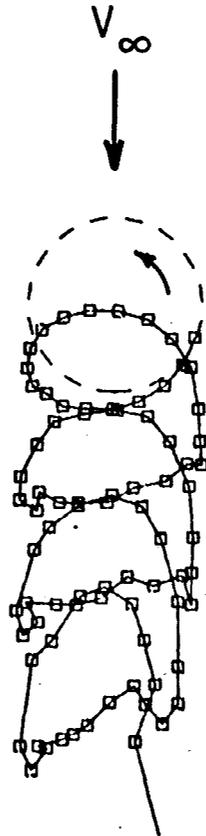


FIGURE 2

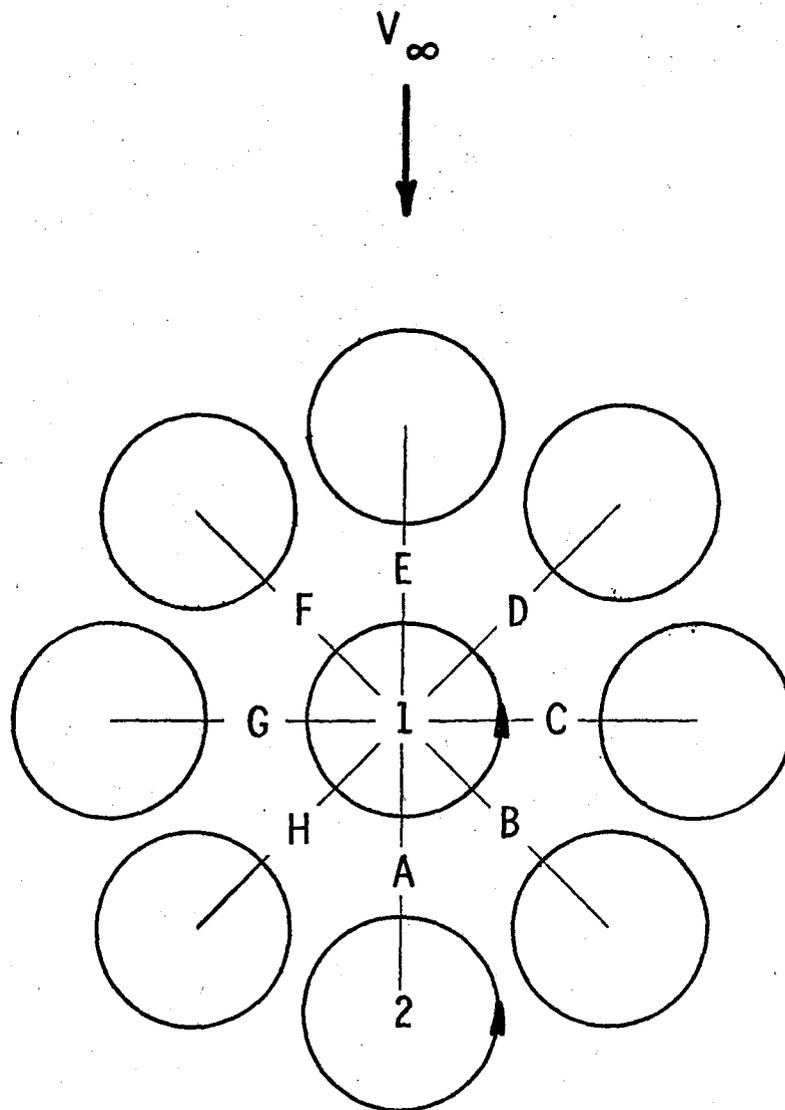


FIGURE 3

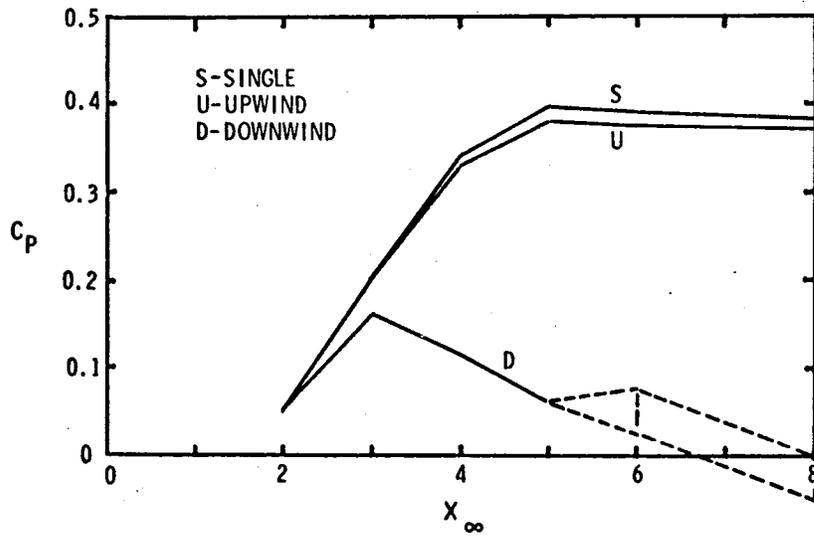


FIGURE 4

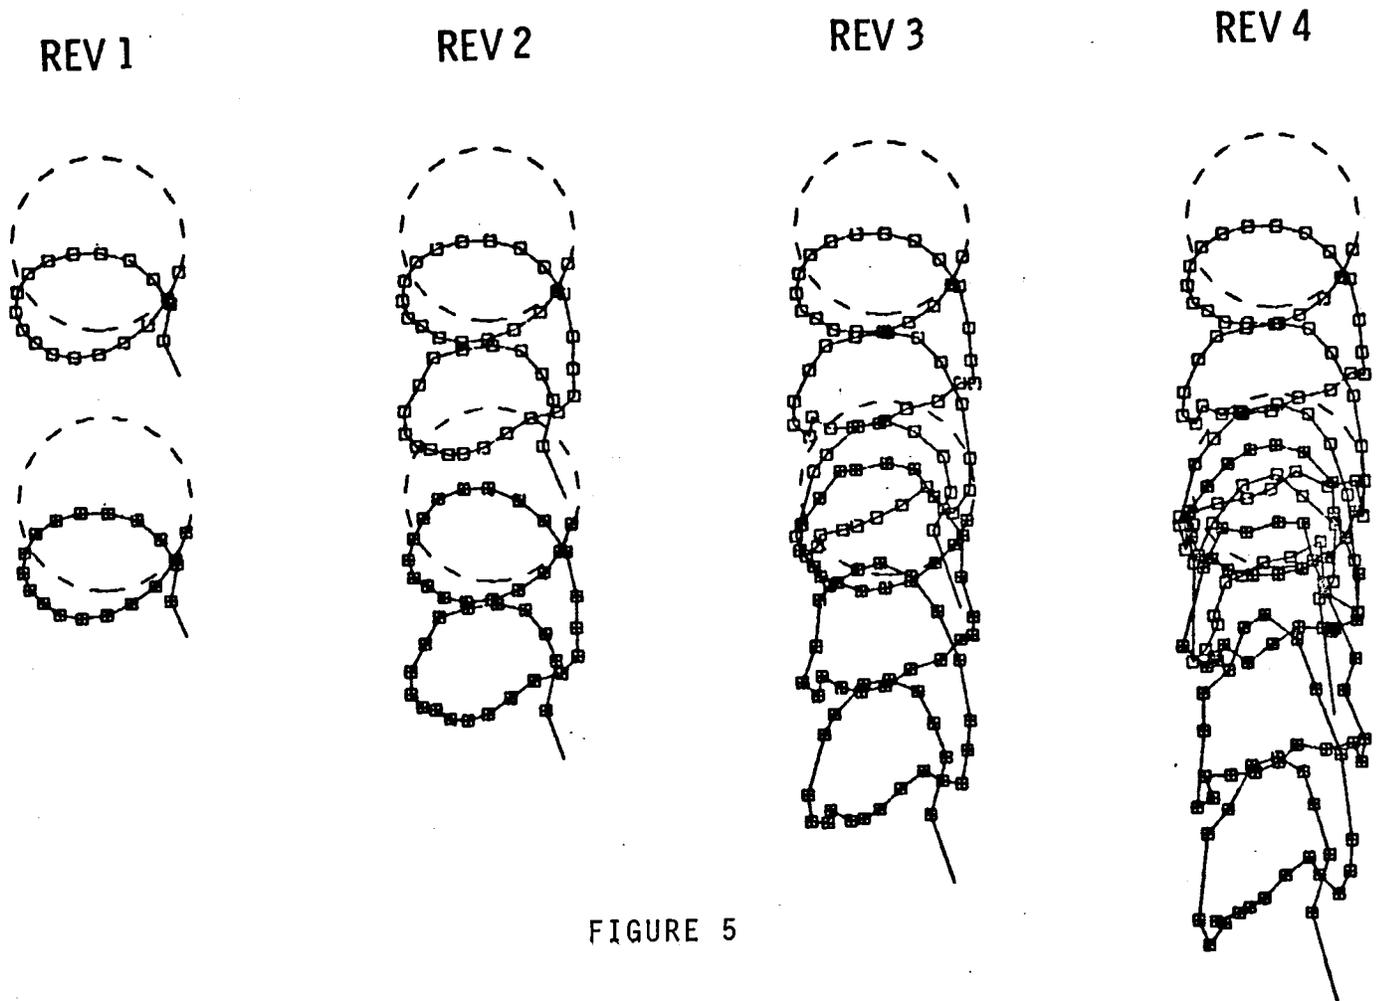


FIGURE 5

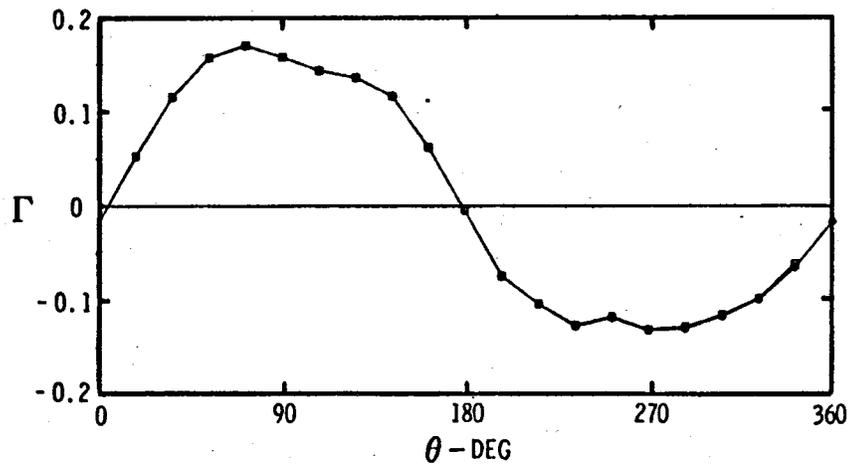


FIGURE 6

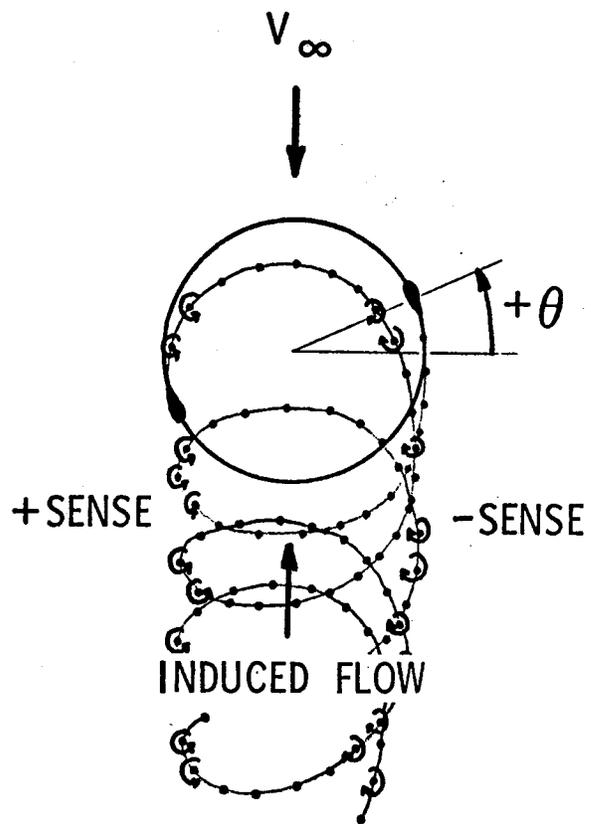


FIGURE 7

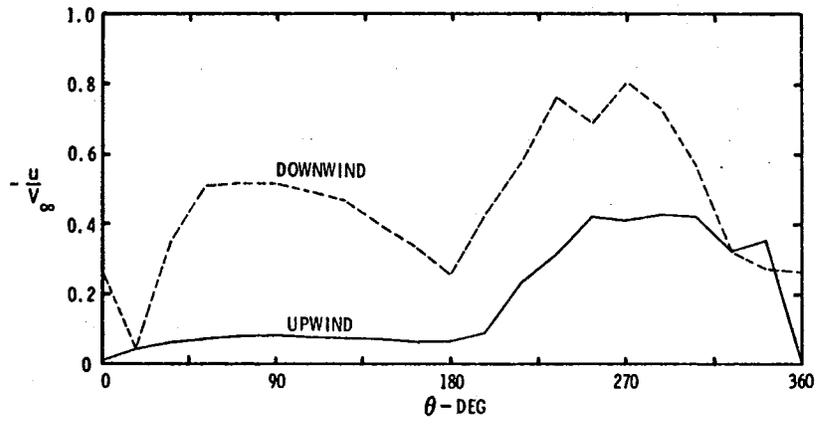


FIGURE 8

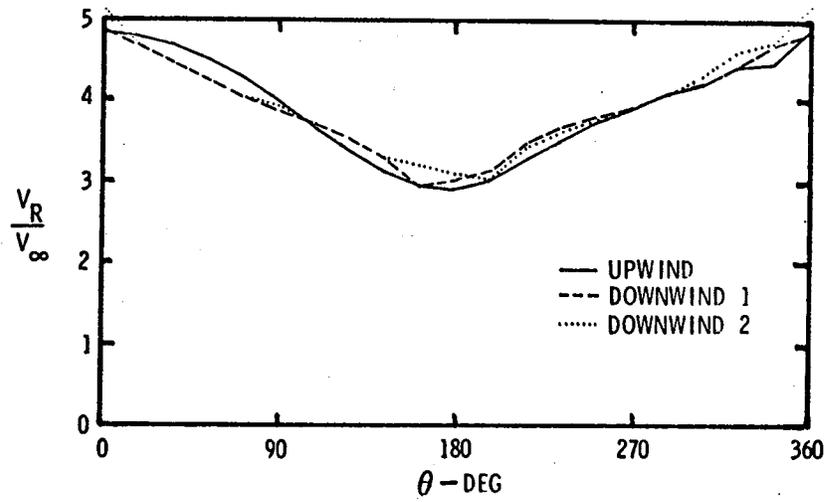


FIGURE 9

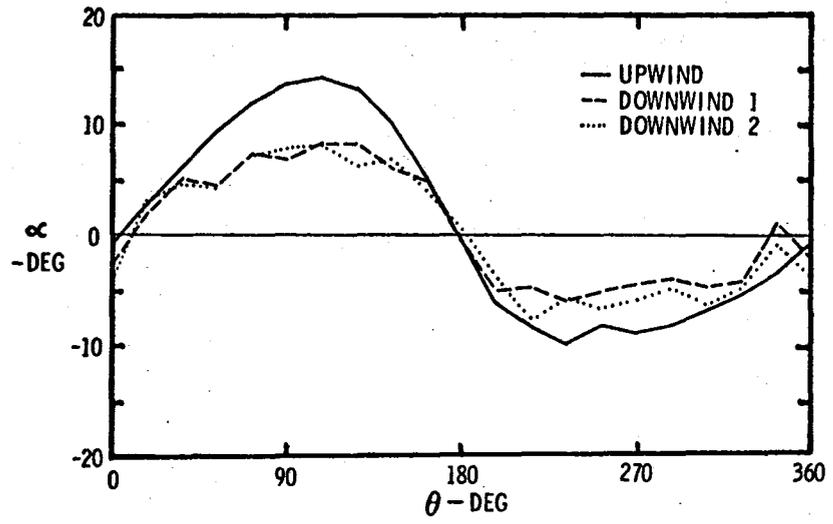


FIGURE 10

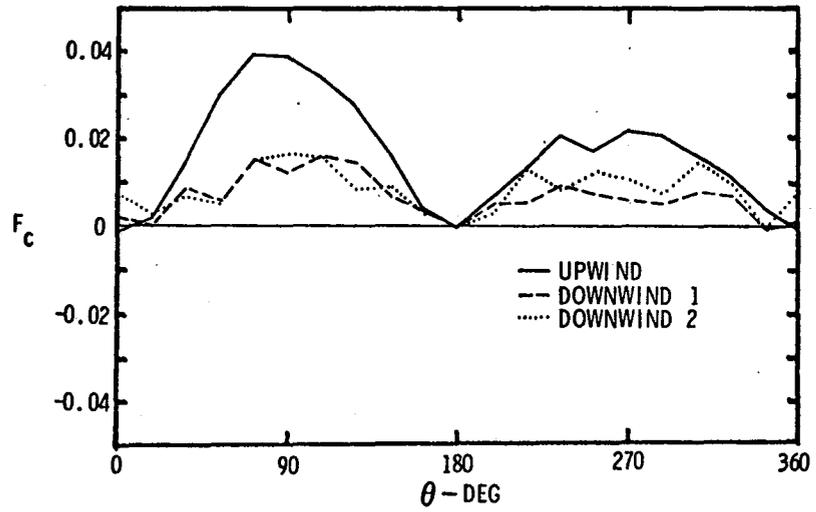


FIGURE 11

DISTRIBUTION:

TID-4500-R66 UC-60 (283)

Aero Engineering Department (2)
Wichita State University
Wichita, KS 67208
Attn: M. Snyder
W. Wentz

R. E. Akins, Assistant Professor
Department of Engineering Science
and Mechanics
Virginia Polytechnic Institute and
State University
Blacksburg, VA 24060

Alcoa Laboratories (5)
Alcoa Technical Center
Aluminum Company of America
Alcoa Center, PA 15069
Attn: D. K. Ai
A. G. Craig
J. T. Huang
J. R. Jombock
P. N. Vosburgh

Mr. Robert B. Allen
General Manager
Dynergy Corporation
P.O. Box 428
1269 Union Avenue
Laconia, NH 03246

American Wind Energy Association
1609 Connecticut Avenue NW
Washington, DC 20009

E. E. Anderson
South Dakota School of Mines
and Technology
Department of Mechanical Engineering
Rapid City, SD 57701

Scott Anderson
318 Millis Hall
University of Vermont
Burlington, VT 05405

G. T. Ankrum
DOE/Office of Commercialization
20 Massachusetts Avenue NW
Mail Station 2221C
Washington, DC 20585

Holt Ashley
Stanford University
Department of Aeronautics and
Astronautics Mechanical Engineering
Stanford, CA 94305

Kevin Austin
Consolidated Edison Company of
New York, Inc.
4 Irving Place
New York, NY 10003

B. H. Barksdale, Jr.
Hayes, Seay, Mattern, and Mattern
1315 Franklin Road SW
Roanoke, VA 24016

Dr. P. J. Baum
Institute of Geophysics
and Planetary Physics
University of California
Riverside, CA 92521

F. K. Bechtel
Washington State University
Department of Electrical Engineering
College of Engineering
Pullman, WA 99163

M. E. Beecher
Arizona State University
Solar Energy Collection
University Library
Tempe, AZ 85281

Leon Bjervig
Civilingenior, MCIF
"Osterbyhus", 6990 Ulfborg
DK6990
DENMARK

K. Bergey
University of Oklahoma
Aero Engineering Department
Norman, OK 73069

Steve Blake
Wind Energy Systems
Route 1, Box 93-A
Oskaloosa, KS 66066

Robert Brulle
McDonnell-Douglas Aircraft Corporation
P.O. Box 516
Department 341, Building 32/2
St. Louis, MO 63166

R. Camerero
Faculty of Applied Science
University of Sherbrooke
Sherbrooke, Quebec
CANADA J1K 2R1

CERCEM
49 Rue du Commandant Rolland
93350 Le Bourget
FRANCE
Attn: G. Darrieus
J. Delassus

Professor V. A. L. Chasteau
School of Engineering
University of Auckland
Private Bag
Auckland, NEW ZEALAND

Howard T. Clark
McDonnell Aircraft Corporation
P.O. Box 516
Department 337, Building 32
St. Louis, MO 63166

Dr. R. N. Clark
USDA, Agricultural Research Service
Southwest Great Plains Research Center
Bushland, TX 79012

Joan D. Cohen
Consumer Outreach Coordinator
State of New York
Executive Department
State Consumer Protection Board
99 Washington Avenue
Albany, NY 12210

Dr. D. E. Cromack
Associate Professor
Mechanical and Aerospace Engineering
Department
University of Massachusetts
Amherst, MA 01003

Gale B. Curtis
Tumac Industries
650 Ford Street
Colorado Springs, CO 80915

DOE/ALO (2)
Albuquerque, NM 87115
Attn: G. P. Tennyson

DOE Headquarters/WESD (20)
600 E Street NW
Washington, DC 20585
Attn: D. F. Ancona
C. E. Aspliden
L. V. Divone
W. C. Reddick

C. W. Dodd
School of Engineering
Southern Illinois University
Carbondale, IL 62901

D. D. Doerr
Kaiser Aluminum and Chemical Sales, Inc.
6177 Sunol Blvd.
P.O. Box 877
Pleasanton, CA 94566

Dominion Aluminum Fabricating Ltd. (2)
3570 Hawkestone Road
Mississauga, Ontario
CANADA L5C 2U8
Attn: L. Schienbein
C. Wood

D. P. Dougan
Hamilton Standard
1730 NASA Boulevard
Room 207
Houston, TX 77058

J. B. Dragt
Nederlands Energy Research Foundation (E.C.N.)
Physics Department
Westerduinweg 3 Patten (nh)
THE NETHERLANDS

C. E. Elderkin
Battelle-Pacific Northwest Laboratory
P.O. Box 999
Richland, WA 99352

Frank R. Eldridge, Jr.
The Mitre Corporation
1820 Dolley Madison Blvd.
McLean, VA 22102

Electric Power Research Institute
3412 Hillview Avenue
Palo Alto, CA 94304
Attn: E. Demeo

Richard G. Ferreira, Chief
The Resources Agency
Department of Water Resources
Energy Division
1416 9th Street
P.O. Box 388
Sacramento, CA 95802

D. R. Finley
New England Geosystems
P.O. Box 128
East Derry, NH 03041

James D. Fock, Jr.
Department of Aerospace Engineering Sciences
University of Colorado
Boulder, CO 80309

Dr. Lawrence C. Frederick
Public Service Company of New Hampshire
1000 Elm Street
Manchester, NH 03105

H. Gerardin
Mechanical Engineering Department
Faculty of Sciences and Engineering
Universite Laval-Quebec
CANADA G1K 7P4

E. Gilmore
Amarillo College
Amarillo, TX 79100

Paul Gipe
Wind Power Digest
P.O. Box 539
Harrisburg, PA 17108

Roger T. Griffiths
University College of Swansea
Department of Mechanical Engineering
Singleton Park
Swansea SA2 8PP
UNITED KINGDOM

Richard Haddad
101 Arizona
P.O. Box 530
El Paso, TX 79944

A. A. Hagman
Kaiser Aluminum and Chemical Sales, Inc.
14200 Cottage Grove Avenue
Dolton, IL 60419

Martin L. Hally, Section Manager
Project Department
Electricity Supply
18 St. Stephen's Green
Dublin 2, IRELAND

Professor N. D. Ham
Massachusetts Institute of Technology
77 Massachusetts Avenue
Cambridge, MA 02139

C. F. Harris
Wind Engineering Corporation
Airport Industrial Area
Box 5936
Lubbock, TX 79415

W. L. Harris
Aero/Astro Department
Massachusetts Institute of Technology
Cambridge, MA 02139

Terry Healy (2)
Rockwell International
Rocky Flats Plant
P.O. Box 464
Golden, CO 80401

Helion
P.O. Box 4301
Sylmar, CA 91342

Don Hinrichsen
Associate Editor
AMBIO
KVA
Fack, S-10405
Stockholm
SWEDEN

Sven Hugosson
Box 21048
S. 100 31 Stockholm 21
SWEDEN

O. Igra
Department of Mechanical Engineering
Ben-Gurion University of the Negev
Beer-Sheva, ISRAEL

Indian Oil Corporation, Ltd.
Marketing Division
254-C, Dr. Annie Besant Road
Prabhadevi, Bombay-400025
INDIA

JBF Scientific Corporation
2 Jewel Drive
Wilmington, MA 01887
Attn: E. E. Johanson

Dr. Gary L. Johnson, P.E.
Electrical Engineering Department
Kansas State University
Manhattan, KS 66506

B. O. Kaddy, Jr.
Box 353
31 Union Street
Hillsboro, NH 03244

Kaman Aerospace Corporation
Old Windsor Road
Bloomfield, CT 06002
Attn: W. Batesol

R. L. Katzenberg
2820 Upton St. NW
Washington, DC 20008

Robert E. Kelland
The College of Trades and Technology
P.O. Box 1693
Prince Philip Drive
St. John's, Newfoundland
CANADA A1C 5P7

S. King
Natural Power, Inc.
New Boston, NH 03070

Larry Kinnett
P.O. Box 6593
Santa Barbara, CA 93111

Samuel H. Kohler
272 Old Delp Road
Lancaster, PA 17602

O. Krauss
Michigan State University
Division of Engineering Research
East Lansing, MI 48824

Carol Lamb
2584 East Geddes Avenue
Littleton, CO 80122

Lawrence Livermore Laboratory
P.O. Box 808 L-340
Livermore, CA 94550
Attn: D. W. Dorn

M. Lechner
Public Service Company of New Mexico
P.O. Box 2267
Albuquerque, NM 87103

Kalman Nagy Lehoczky
Cort Adeliers GT. 30
Oslo 2
NORWAY

George E. Lennox
Industry Director
Mill Products Division
Reynolds Metals Company
6601 West Broad Street
Richmond, VA 23261

J. Lerner
State Energy Commission
Research and Development Division
1111 Howe Avenue
Sacramento, CA 95825

L. Liljidahl
Building 303
Agriculture Research Center
USDA
Beltsville, MD 20705

P. B. S. Lissaman
Aeroenvironment, Inc.
660 South Arroyo Parkway
Pasadena, CA 91105

Olle Ljungstrom
FFA, The Aeronautical Research Institute
Box 11021
S-16111 Bromma
SWEDEN

T. H. Logan
U.S. Turbine Corporation
Olde Courthouse Building
Canfield, OH 44406

J. B. Longendyck
Siltex
7 Capitol Drive
Moonachie, NJ 07074

Los Alamos Scientific Laboratories
P.O. Box 1663
Los Alamos, NM 87544
Attn: J. D. Balcomb Q-DO-T

Beatrice de Saint Louvent
Etablissement d'Etudes et de Recherches
Meteorologiques
77, Rue de Serves
92106 Boulogne-Billancourt Cedex
FRANCE

Ernel L. Luther
Senior Associate
PRC Energy Analysis Co.
7600 Old Springhouse Rd.
McLean, VA 22101

L. H. J. Maile
48 York Mills Rd.
Willowdale, Ontario
CANADA M2P 1B4

E. L. Markowski
Motolola, Inc.
G.E.D.
Mail Drop 1429
8201 E. McDowell Rd.
P.O. Box 1417
Scottsdale, AZ 85252

Jacques R. Maroni
Ford Motor Company
Environmental Research and Energy
Planning Director
Environmental and Safety Engineering Staff
The American Road
Dearborn, MI 48121

Frank Matanzo
Dardalen Associates
15110 Frederick Road
Woodbine, MD 21797

H. S. Matsuda, Manager
Composite Materials Laboratory
Pioneering R&D Laboratories
Toray Industries, Inc.
Sonoyama, Otsu, Shiga
JAPAN 520

J. R. McConnell
Tumac Industries, Inc.
650 Ford St.
Colorado Springs, CO 80915

James Meiggs
Kaman Sciences Corporation
P.O. Box 7463
Colorado Springs, CO 80933

R. N. Meroney
Colorado State University
Department of Civil Engineering
Fort Collins, CO 80521

G. N. Monsson
Department of Economic Planning
and Development
Barrett Building
Cheyenne, WY 82002

NASA Lewis Research Center (4)
21000 Brookpark Road
Cleveland, OH 44135
Attn: J. Savino
R. L. Thomas
W. Robbins
K. Kaza

Anthony A. Nedd
The Power Company, Inc.
P.O. Box 221
Genesee Depot, WI 53217

V. Nelson
West Texas State University
Department of Physics
P.O. Box 248
Canyon, TX 79016

Leander Nichols
Natural Power, Inc.
New Boston, NH 03070

Ronald Nousain
P.O. Box 111
Rome 1132
Los Angeles, CA 90051

Oklahoma State University (2)
Stillwater, OK 76074
Attn: W. L. Hughes
EE Department
D. K. McLaughlin
ME Department

Oregon State University (2)
Corvallis, OR 97331
Attn: R. E. Wilson
ME Department
R. W. Thresher
ME Department

Pat F. O'Rourke
Precinct 4
County Commissioner
City-County Building
El Paso, TX 79901

H. H. Paalman
Dow Chemical USA
Research Center
2800 Mitchell Drive
Walnut Creek, CA 94598

Dr. Y. H. Pao, Chairman
Flow Industries, Inc.
21414 68th Ave. South
Kent, WA 98031

Ion Paraschivoiu
IREQ
1800 montee Ste-Julie
Varenes, Qeubec
CANADA JOL 2PO

R. A. Parmalee
Northwestern University
Department of Civil Engineering
Evanston, IL 60201

Helge Petersen
Riso National Laboratory
DK-4000 Roskilde
DENMARK

Wilson Prichett, III
National Rural Electric Cooperative
Association
1800 Massachusetts Avenue NW
Washington, DC 20036

Dr. Barry Rawlings, Chief
Division of Mechanical Engineering
Commonwealth Scientific and Industrial
Research Organization
Graham Road, Highett
Victoria, 3190
AUSTRALIA

Thomas W. Reddoch
Associate Professor
Department of Electrical Engineering
The University of Tennessee
Knoxville, TN 37916

Ray G. Richards
Atlantic Wind Test Site
P.O. Box 189
Tignish P.E.I.
COB 2B0 CANADA

A. Robb
Memorial University of Newfoundland
Faculty of Engineering and Applied Sciences
St. John's Newfoundland
CANADA A1C 5S7

J. R. Rodriguez
Solarwind Energy Corporation
1163 Pomona Road
Unit A
Corona, CA 91720

Dr. -Ing. Hans Ruscheweyh
Institut fur Leichbau
Technische Hochschule Aachen
Wullnerstrasse 7
GERMANY

Gwen Schreiner
Librarian
National Atomic Museum
Albuquerque, NM 87185

Douglas B. Seely, P.E.
U.S. Department of Energy
P.O. Box 3621
102 NE Holladay
Portland, OR 97208

Arnan Seginer
Professor of Aerodynamics
Technion-Israel Institute of
Technology
Department of Aeronautical
Engineering
Haifa, ISRAEL

Dr. Horst Selzer
Dipl.-Phys.
Wehrtechnik und Energieforschung
ERNO-Raumfahrttechnik GmbH
Hunefeldstr. 1-5
Postfach 10 59 09
2800 Bremen 1
GERMANY

H. Sevier
Rocket and Space Division
Bristol Aerospace Ltd.
P.O. Box 874
Winnipeg, Manitoba
CANADA R3C 2S4

P. N. Shankar
Aerodynamics Division
National Aeronautical Laboratory
Bangalore 560017
INDIA

David Sharpe
Kingston Polytechnic
Canbury Park Road
Kingston, Surrey
UNITED KINGDOM

D. G. Shepherd
Cornell University
Sibley School of Mechanical and
Aerospace Engineering
Ithaca, NY 14853

Dr. Fred Smith
Mechanical Engineering Department Head
Colorado State University
Ft. Collins, CO 80521

Kent Smith
Instituto Tecnológico Costa Rica
Apartado 159 Cartago
COSTA RICA

Leo H. Soderholm
Iowa State University
Agricultural Engineering, Room 213
Ames, IA 50010

Bent Sorenson
Roskilde University Center
Energy JGroup, Bldg. 17.2
IMFUFA
P.O. Box 260
DK-400 Roskilde
DENMARK

Southwest Research Institute (2)
P.O. Drawer 28501
San Antonio, TX 78284
Attn: W. L. Donaldson, Senior Vice President
R. K. Swanson

Rick Stevenson
Route 2
Box 85
Springfield, MO 65802

Dale T. Stjernholm, P.E.
Mechanical Design Engineer
Morey/Stjernholm and Associates
1050 Magnolia Street
Colorado Springs, CO 80907

G. W. Stricker
130 Merchant St. #1104
Honolulu, HI 96813

C. J. Swet
Route 4
Box 358
Mt. Airy, MD 21771

John Taylor
National Research Council
ASEB
2101 Constitution Avenue
Washington, DC 20418

R. J. Templin (3)
Low Speed Aerodynamics Section
NRC-National Aeronautical Establishment
Ottawa 7, Ontario
CANADA K1A 0R6

Texas Tech University (3)
P.O. Box 4389
Lubbock, TX 79409
Attn: K. C. Mehta, CE Department
J. Strickland, ME Department
J. Lawrence, ME Department

Fred Thompson
Atari, Inc.
155 Moffett Park Drive
Sunnyvale, CA 94086

J. M. Turner, Group Leader
Terrestrial Energy Technology Program Office
Energy Conversion Branch
Aerospace Power Division
Aero Propulsion Laboratory
Department of the Air Force
Air Force Wright Aeronautical Laboratories (AFSC)
Wright-Patterson Air Force Base, OH 45433

United Engineers and Constructors, Inc.
Advanced Engineering Department
30 South 17th Street
Philadelphia, PA 19101
Attn: A. J. Karalis

University of New Mexico (2)
New Mexico Engineering Research Institute
Campus, P.O. Box 25
Albuquerque, N.M. 87131
Attn: G. G. Leigh

University of New Mexico (2)
Albuquerque, NM 87106
Attn: K. T. Feldman
Energy Research Center
V. Sloglund
ME Department

Jan Vacek
Eolienne experimentale
C.P. 279, Cap-aux-Meules
Iles de la Madeleine, Quebec
CANADA

Irwin E. Vas
Solar Energy Research Institute
1617 Cole Blvd.
Golden, CO 80401

Otto de Vries
National Aerospace Laboratory
Anthony Fokkerweg 2
Amsterdam 1017
THE NETHERLANDS

R. Walters
West Virginia University
Department of Aero Engineering
1062 Kountz Avenue
Morgantown, WV 26505

E. J. Warchol
Bonneville Power Administration
P.O. Box 3621
Portland, OR 97225

D. F. Warne, Manager
Energy and Power Systems
ERA Ltd.
Cleeve Rd.
Leatherhead
Surrey KT22 7SA
ENGLAND

G. R. Watson, Project Manager
The Energy Center
Pennine House
4 Osborne Terrace
Newcastle upon Tyne NE2 1NE
UNITED KINGDOM

R. J. Watson
Watson Bowman Associates, Inc.
1280 Niagara St.
Buffalo, NY 14213

R. G. Watts
Tulane University
Department of Mechanical Engineering
New Orleans, LA 70018

W. G. Wells, P.E.
Associate Professor
Mechanical Engineering Department
Mississippi State University
Mississippi State, MS 39762

T. Wentink, Jr.
University of Alaska
Geophysical Institute
Fairbanks, AK 99701

West Texas State University
Government Depository Library
Number 613
Canyon, TX 79015

Wind Energy Report
Box 14
102 S. Village Ave.
Rockville Centre, NY 11571
Attn: Farrell Smith Seiler

Wind Program Manager
Wisconsin Division of State Energy
8th Floor
101 South Webster Street
Madison, WI 53702

Richard E. Wong
Assistant Director
Central Solar Energy Research Corp.
1200 Sixth Street
328 Executive Plaza
Detroit, MI 48226

1000 G. A. Fowler
1200 L. D. Smith
2525 R. P. Clark
3141 T. L. Werner (5)
3151 W. L. Garner (3)
For DOE/TIC (Unlimited Release)
3161 J. E. Mitchell (15)
3161 P. S. Wilson
4533 J. W. Reed
4700 J. H. Scott
4710 G. E. Brandvold
4715 R. H. Braasch (200)
4715 J. D. Cyrus
4715 R. D. Grover
4715 E. G. Kadlec
4715 P. C. Klimas
4715 M. T. Mattison
4715 R. O. Nellums
4715 W. N. Sullivan
4715 R. A. Watson
4715 D. F. Wolf
4715 M. H. Worstell
5520 T. B. Lane
5523 R. C. Reuter, Jr.
5523 T. G. Carne
5523 D. B. Clauss
5523 D. W. Lobitz
5523 P. S. Veers
5600 D. B. Schuster
5620 M. M. Newsom
5630 R. C. Maydew
5633 R. E. Sheldahl
5636 J. K. Cole
5636 D. E. Berg
5636 W. H. Curry
DOE/TIC (25)
(R. P. Campbell, 3154-3)